

OpenVPX All-Metal Slim Handle & Panel Set, Type X



3U & 6U



KEY FEATURES


- 3U or 6U OpenVPX panels with all-metal slim ejector handles in 1.0" width (consult sales for other size options)
- Improved load carrying 48 kg [8.8 lbs] per PCB at 5HP
- Rugged metal claw prevents breaking and wear compared to plastic versions
- Supports up to 850N of insertion/extraction force
- Self locking with push button
- Custom cutouts, silk-screening, powder coating available

The All-Metal Slim OpenVPX handles/panel sets from Pixus come in a 3U or 6U size. The standard panel width is 1.0" and they come alodined with a clear chrome. The Type X handles features an all-metal design and a slim handle that minimizes the space that is covered on the faceplate. The result is a highly rugged latch with more I/O space available on front panel.

OpenVPX All-Metal Slim Handle & Panel Sets, Type X



Type X Handle Diagram with 6U OpenVPX Panel

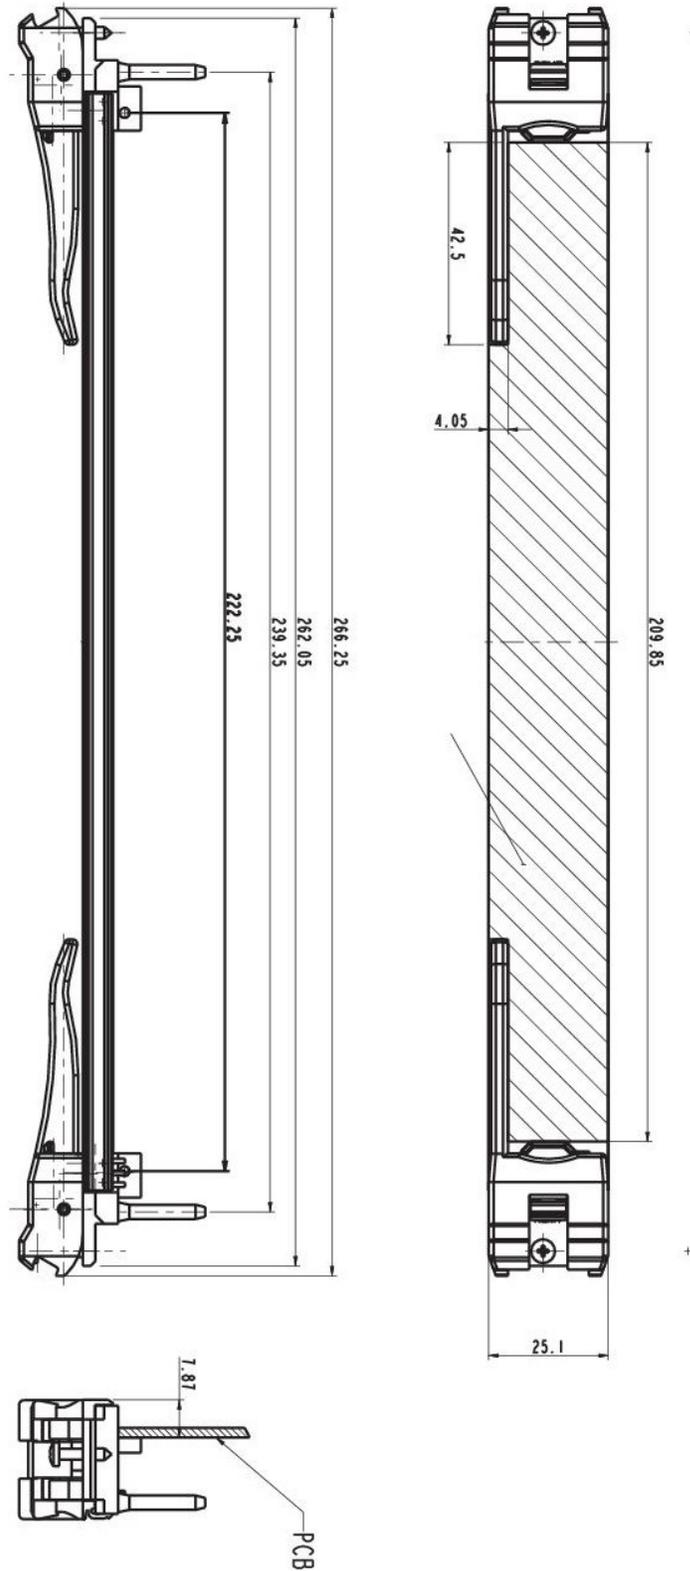

OpenVPX All-Metal Slim Handle & Panel Sets, Type X



OpenVPX Front Panel, With Type X injector/Extractor Handle

Material:

Front Panel: 2.5mm aluminum, extruded, clear chromated

Handle: Metal

U = 1.75", TE/HP = 0.2"



Supply Includes:

1 front panel, 2 Type X handle (1 Type X handle for 3U)

1 vertical EMC gasket

1 set of assembly parts

2 PCB holders

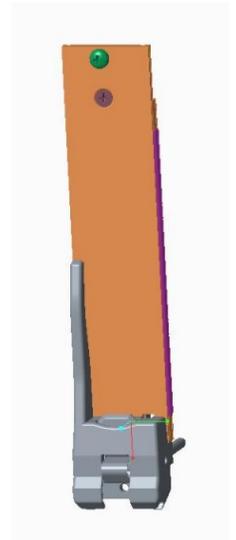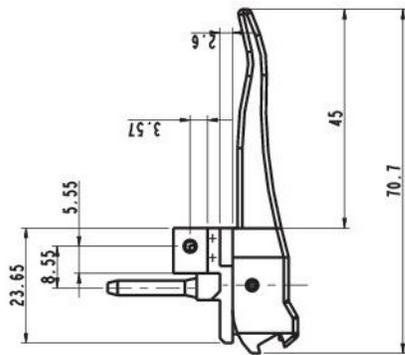

Panel height	TE (HP)	H mm	a mm	b mm	Part Number
3U	5	262.05	25.1	11.35	PA31050
6U	5	262.05	25.1	11.35	9922678

Consult Sales for other panel sizes or handle-only requirements.

